

LAVAVAJILLAS Y LAVAVASOS


DISHWASHERS & GLASSWASHERS

MODELOS · MODELS LX

1/2



Mod.: LX 60

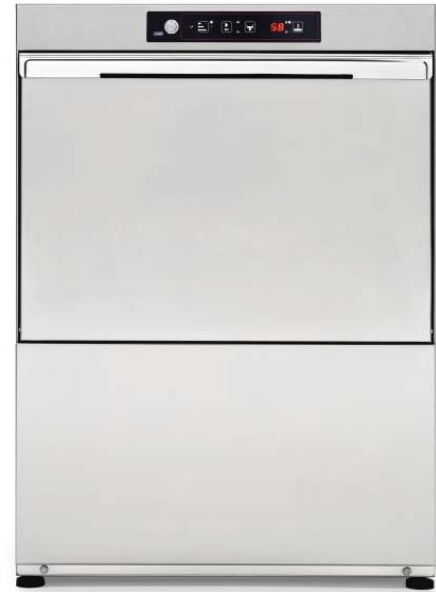

Mod.: LX 41

LAVAVAJILLAS	DISHWASHERS	LX 45	LX 50	LX 60	LX 80
Dimensiones (mm)	Dimensions (mm)				
Ancho	Width	520	600	600	600
Fondo	Depth	590	630	630	630
Alto	Height	795	835	835	1320
Dimensiones cesta (mm)	Basket dimensions (mm)	450 x 450	500 x 500	500 x 500	500 x 500
Altura máx. vajilla (mm)	Max. dish height (mm)	280	330	330	400
Ciclo (s)	Cycle (s)	120/180/210	120/180/210	120/180/210	120/180/210
Potencia (W)	Power (W)				
Electrobomba	Wash pump	370	370	550	730
Tanque de lavado	Wash tank	1500	2500	2500	2500
Calderín de aclarado	Boiler	2500	2500	2500	2500
Potencia total	Total power	3170	3370	6550	6730
Tensión (V - ph)	Voltage (V - ph)	230 - II	230 - II	230-II 230/400/440-III	230-II 230/400/440-III
Peso neto (kg)	Net weight (kg)	54	63	63	78

MODELOS · MODELS

LX

2/2

- Lavado mediante doble sistema de aspersores giratorios (superior e inferior)
- 3 ciclos de lavado
- Construcción en acero inoxidable AISI 304 2B
- Doble pared en la puerta con junta
- Micro de seguridad en la puerta
- Difusores de acero inoxidable de alto rendimiento que garantizan una distribución del agua de lavado sin zonas muertas y con ángulos adecuados y chorros precisos, obteniendo un resultado de lavado óptimo incluso para la suciedad más resistente
- Fácil extracción de los difusores sin herramientas para su mantenimiento y limpieza
- Difusores de aclarado sin tornillos
- Doble sistema de filtrado para una mayor protección de la bomba de lavado
- Interior de la máquina con acabados redondeados
- Dosificador de abrillantador incorporado
- Mandos antihumedad
- Termostatos regulables en cuba la-vado y calderín y de seguridad en calderín
- For washing glasses, cups, cutlery and small plates
- 3 wash cycles with final cold rinse
- Manufactured from catering grade AISI 304 2B stainless steel
- Double skinned door with high efficiency seal
- Magnetic door micro-switch
- Removable stainless steel rack holders ensure even distribution of wash water without dead zones
- Precision positioned water jets guarantee optimum washing result for even the most stubbornly stained glasses
- Easy to assemble, boltless rinse spray arms
- A double filter system provides effective wash pump protection that is easily removed, without tools
- Inside of the machine with rounded finished: absence of angles avoiding the accumulation of dirt
- Completely rounded, stainless steel wire rack support and guide
- Automatic rinse aid dosing equipment
- Electronic control panel with anti-moisture seal
- Adjustable washing tank and boiler temperature and security in the boiler

LAVAVASOS	GLASSWASHERS	LX 35	LX 40	LX 41
Dimensiones (mm)	Dimensions (mm)			
Ancho	Width	420	470	470
Fondo	Depth	495	535	535
Alto	Height	645	670	710
Dimensiones cesta (mm)	Basket dimensions (mm)	350 x 350	400 x 400	400 x 400
Altura máxima vajilla (mm)	Maximum dish height (mm)	220	240	280
Ciclo (s)	Cycle (s)	120/180/210	120/180/210	120/180/210
Potencia (W)	Power (W)			
Electrobomba	Wash pump	75	220	240
Tanque de lavado	Wash tank	1500	1500	1500
Calderín de aclarado:	Boiler:	2500	2500	2500
Potencia total	Total power	2875	3020	3040
Tensión (V - ph)	Voltage (V - ph)	230 - II	230 - II	230 - II
Peso neto (kg)	Net weight (kg)	33	41	42